

Law Offices  
FOLEY & LARDNER  
Suite 500  
3000 K Street, N.W.  
Washington, DC 20007-5109  
(202) 672-5300

Assistant Commissioner for Patents  
Box Patent Applications  
Washington D.C. 20231

Attorney Docket No. 040281-0118

(must include alphanumeric codes if no inventors named)

**UTILITY PATENT APPLICATION TRANSMITTAL**  
**(new nonprovisional applications under 37 CFR 1.53(b))**

Transmitted herewith for filing is the patent application of:

INVENTOR(S): Hirotaka ISHII, Takeo MORITA, Yasuhide YOMO

TITLE: FINGERPRINT IDENTIFICATION DEVICE EQUIPPED WITH A USER RECORDING  
DEVICE

In connection with this application, the following are enclosed:

**APPLICATION ELEMENTS:**

XX Specification - 14 TOTAL PAGES

(preferred arrangement:)

- Descriptive Title of the Invention
- Cross Reference to Related Applications
- Statement Regard Fed sponsored R&D
- Reference to Microfiche Appendix
- Background of the Invention
- Brief Summary of the Invention
- Brief Description of the Drawings (if filed)
- Detailed Description
- Claim(s)
- Abstract of the Disclosure

XX Drawings - Total Sheets 7

XX Declaration and Power of Attorney - Total Sheets 2

   Newly executed (original or copy)

   Copy from a prior application (37 CFR 1.63(d))

(relates to continuation/divisional boxes completed) - NOTE: Box below

   DELETION OF INVENTOR(S) - Signed statement attached deleting inventor(s)  
named in the prior application, see 37 CFR 1.63(d)(2) and 1.33(b).

   Incorporation By Reference (useable if copy of prior application  
Declaration being submitted)

The entire disclosure of the prior application, from which a COPY of the  
oath or declaration is supplied as noted above, is considered as being  
part of the disclosure of the accompanying application and is hereby  
incorporated by reference therein.

   Microfiche Computer Program (Appendix)

   Nucleotide and/or Amino Acid Sequence Submission (if applicable,  
all necessary)

- Computer Readable Copy
- Paper Copy (identical to computer copy)
- Statement verifying identify of above copies

**ACCOMPANYING APPLICATION PARTS**

- Assignment Papers (cover sheet & document(s))
- 37 CFR 3.73(b) Statement (when there is an assignee)
- English Translation Document (if applicable)
- Information Disclosure Statement(IDS) with PTO-1449.    Copies of IDS Citations

☐ Preliminary Amendment  
☒ Return Receipt Postcard (MPEP 503)  
☐ Small Entity Statement(s)  
☐ Statement file in prior application, status still proper and desired.  
☐ Certified Copy of Priority Document(s) with Claim of Priority  
(if foreign priority is claimed).  
☐ OTHER:

If a **CONTINUING APPLICATION**, check appropriate box and supply the requisite information:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP)  
of prior application Serial No. .

☐ Amend the specification by inserting before the first line the following sentence: --This application is a ☐ continuation, ☐ divisional or ☐ continuation-in-part of application Serial No. , filed .--

**CORRESPONDENCE ADDRESS:**

Foley & Lardner Address noted above.  
Telephone: (202) 672-5300  
Fax Number: (202) 672-5399

**FEE CALCULATIONS:** (Small entity fees indicated in parentheses.)

(1) For	(2) Number Filed	(3) Number Extra	(4) Rate	(5) Basic Fee \$760 (\$380)
Total Claims	9 - 20 =	0	x \$18 (x \$9)	0.00
Independent Claims	1 - 3 =	0	x \$78 (x \$39)	0.00
Multiple Dependent Claims			\$260 (\$130)	0.00
Assignment Recording Fee per property			\$40	0.00
Surcharge Under 37 C.F.R. 1.16(e)			\$130 (\$65)	\$130.00
TOTAL FEE:				\$890.00

**METHOD OF PAYMENT:**

If payment by check is NOT enclosed, it is requested that the Patent and Trademark Office advise the undersigned of the period of time within which to file the TOTAL FEE.

Respectfully submitted,

Date: November 30, 1999  
Docket No.: 040281-0118

  
Brian J. McNamara  
Reg. No. 32,789

**Fingerprint Identification Device**  
**Equipped With A User Recording Unit**

**Field Of The Invention**

This invention relates to a fingerprint identification device which can discriminate between different individuals by their fingerprints. Specifically, the fingerprint identification device according to present invention is equipped with a user recording unit . The user recording unit records the fingerprint of users for the purpose of the maintenance, repair or for providing higher security.

**Background Of The Invention**

Figure 1 is a block diagram of a prior art finger identification device A to verify fingerprints. Fingerprint identification device A includes a fingerprint reader unit 1 including an optical read-in system 3 and a photoelectric converter element 7, and an operation processing unit 2.

Figure 2 shows a configuration of the fingerprint reader unit 1. Optical read-in system 3 consists of a light source 4, such as a light-emitting diode or the like; a triangular prism 5, to which a person's finger f is applied, and which selectively emits light in an optical pattern corresponding to the pattern of the fingerprint; and a condensing lens 6. Photoelectric converter element 7 generates binary electrical signals which correspond to the optical pattern focussed by condensing lens 6. The photoelectric converter element 7 might, for example, consist of a Charge Coupled Device (CCD).

In the fingerprint reader unit 1, when a finger f, which is the object of investigation, is placed on the oblique surface of the prism 5, the light from the light source 4 which enters the prism 5 is totally reflected by the surface of the prism in conjunction with the grooves of the fingerprint (or print). This reflected light travels toward the lens 6. At the ridges of the print, the light passes through the oblique surface of prism 5 and is scattered by the print. In other words, the light is totally reflected by the grooves of the fingerprint and creates the light portion of the image, while the light is scattered by the ridges of the print and creates the dark portion of the image. The light from light source 4 is thus selectively reflected by the oblique

surface of prism 5 in a pattern of light and dark portions which exactly matches the fingerprint pattern. The optical pattern of light and dark portions which is reflected by prism 5 is condensed by the condensing lens 6 and focussed on the photoelectric converter element 7. The optical pattern focussed on element 7 is converted by element 7 into binary electrical signals which are then output, as image data representing the pattern of the fingerprint, to the operation processing unit 2.

As can be seen in Figure 1, the operation processing unit 2 consists of an image data processing unit 8, a feature extraction unit 9, a comparison unit 10 and a database unit 11.

Image data processing unit 8 executes various processing routines such as correcting and compressing the image data transmitted from photoelectric converter element 7. Based on a specified algorithm known to those skilled in the art, feature extraction unit 9 extracts features from the fingerprint pattern (i.e., the image data) processed by image data processing unit 8. For example, it might use the scheme disclosed in Japanese Patent publication 5-54129.

Database unit 11 records, prior to use, the fingerprint data (e.g., the feature count) for legitimate or authorized users of the device. Comparison unit 10 compares the fingerprint data (e.g., the feature count) extracted by feature extraction unit 9 with the data (or count) for the authorized users which are recorded in the database unit 11 and determines whether or not they match.

If comparison unit 10 determines that the fingerprint data matches, it outputs judgment data indicating that the match was successful, and a specified operation is executed (for example, the door is unlocked and the person is granted entry, or the car engine is started). If the match is not successful, comparison unit 10 outputs judgment data indicating that it has failed to find a match, and the specified operation is prevented.

With this sort of fingerprint identification device, it sometimes occurs that judgment data indicating a successful match is not output even though the user whose finger is on the read-in unit is an authorized user. In this case, the specified operation is prevented. If this sort of failure occurs frequently, the device needs to be repaired, and someone needs to ascertain where the malfunction is occurring.

Failures of this sort may be due to a number of causes. The prism of the read-in unit

may be scratched; the person's finger may be dirty; or there may be foreign matter stuck to the read-in unit or the finger. If any of these things happen, they may cause a problem in the data compression routine used by the image data processing unit to compress the fingerprint pattern, or the features which distinguish one individual's pattern from another's may be difficult to extract, or a problem may occur in the comparison program.

Therefore, such prior art devices to identify fingerprints require much time and effort to determine the cause and the location of a malfunction before any repairs could be made.

### Summary Of The Invention

The present invention was developed, inter alia, to solve the problems discussed above. One of the objective of the present invention is to provide a fingerprint identification device to identify fingerprints which, when malfunctioning, readily allows the location of the malfunction to be ascertained relatively simply.

The fingerprint identification device to identify fingerprints according to the present invention is equipped with: 1) a fingerprint reader unit to input a fingerprint to be detected; 2) a database unit to record a fingerprint database which is provided in advance; 3) a fingerprint comparing unit to identify the input fingerprint input by the fingerprint reader unit by comparing with the fingerprints in the fingerprint database recorded in the database unit; and 4) a user recording unit that records the input fingerprint input by the fingerprint reader unit.

When the fingerprint data input via the aforesaid reader unit is compared with the fingerprint data recorded in the database unit, the input fingerprint data is also recorded in the user recording unit.

The term "fingerprint data" means either the raw fingerprint pattern or processed data resulting when the raw data is processed to extract pertinent features. The raw fingerprint pattern may be the optical pattern of the fingerprint as read optically, the electrical pattern achieved by converting the optical pattern to electrical signals, the data resulting from compressing the electrical pattern, or other similar data generally capable of being substantially restored to the original fingerprint. The processed data is not limited to data

representing features extracted from the original image, but may include data from which the original image cannot be fully restored.

The fingerprint identification device to identify fingerprints disclosed above provides that the fingerprint data input via the reader unit be stored. When a malfunction occurs, a user can try to access the fingerprint data and in this way ascertain whether the cause of the problem is in the step prior to obtaining the data or subsequent to it. This will help determine the source of the malfunction. This design thus makes it easier to ascertain the location of a malfunction when doing inspections or repairs.

All fingerprint data are stored when someone touches the fingerprint reader unit. It also happens when an unauthorized person attempts to touch the reader unit in order to gain access. This provides a psychological deterrent effect. If the fingerprint identification device is installed in a car or on the door of a building, it will prevent the car from being stolen or deter any unauthorized person from entering the building without permission.

Another aspect of the fingerprint identification device to identify fingerprints provides that the fingerprint data input via the aforesaid reader unit is recorded in the aforesaid user recording unit only when the fingerprint data which have been input does not match those which are already stored in the database unit.

Since in fact the only time a user's fingerprint data needs to be saved is when the match is unsuccessful, choosing this expedient allows economies to be realized in the memory capacity of the user recording unit. This also make it less likely that the memory of the user recording unit will fill up so that fingerprint data can no longer be recorded.

Yet another aspect of fingerprint identification device to identify fingerprints provides that the fingerprint data recorded in the aforesaid user recording unit is data representing raw data of the fingerprint which is input via the fingerprint reader unit.

In this embodiment, the fingerprint pattern (i.e., the optical pattern, the electrical pattern, the compressed data, etc.) is recorded in the user recording unit. This allows a greater quantity of fingerprint data to be used and enables the user to make a detailed

diagnosis of the location and cause of a malfunction. And since the fingerprint itself can be restored, the fingerprint identification device can be particularly effective in preventing car theft or unauthorized entry to a building.

5 Still another aspect of fingerprint identification device to identify fingerprints provides that the fingerprint data recorded in the aforesaid user recording unit includes a feature count extracted from the fingerprint pattern input via the fingerprint reader unit.

10 In this embodiment, only the data representing the feature count extracted from the fingerprint pattern is saved. As a result, only a small quantity of data needs to be saved in the user recording unit. This allows the memory capacity in the user recording unit to be put to its best use.

15 Yet another aspect of fingerprint identification device provides that the user recording unit records a recording history along with the fingerprint data input via the reader unit. This recording history could include a variety of data according to a user's needs, such as the date and time the fingerprint was recorded or the power supply voltage at that time.

20 Since this embodiment saves the recording history along with the fingerprint data, the user can investigate the cause of a malfunction by referring to the date and time that the fingerprint identification device first showed signs of trouble. Recording the date in a recording history also is an effective deterrent to car theft and unauthorized entry by providing additional information about the car theft or unauthorized entry.

### 25 Brief Description Of The Drawings

The accompanying drawings, which are incorporated in and constitute a part of the specification, illustrate presently preferred embodiments of the invention, and, together with the general description given above and the detailed description of the preferred embodiments given below, serve to explain the principles of the invention.

30 Figure 1 is a block diagram of a prior art fingerprint identification device to identify fingerprints.

Figure 2 is a sketch of a fingerprint reader unit.

Figure 3 is a block diagram of a fingerprint identification device to identify fingerprints according to a first preferred embodiment of this invention.

Figure 4 is a block diagram of another fingerprint identification device to identify fingerprints according to a second preferred embodiment of this invention.

Figure 5 is a block diagram of yet another fingerprint identification device to identify fingerprints according to a third preferred embodiment of this invention.

Figure 6 is a block diagram of still another fingerprint identification device to identify fingerprints according to a fourth preferred embodiment of this invention.

Figure 7 is a block diagram of yet another fingerprint identification device to identify fingerprints according to a fifth preferred embodiment of this invention.

#### **Detailed Description Of The Preferred Embodiments**

Figure 3 is a block diagram of a fingerprint identification device B to identify fingerprints, according to the first preferred embodiment of this invention. Fingerprint identification device B consists of a fingerprint reader unit 1 and an operation processing unit 2. Fingerprint reader unit 1 consists of an optical reading system 3 and a photoelectric converter element 7. An actual appearance of the fingerprint identification device is as shown in Figure 2. When the person places his finger on optical reading system 3, his fingerprint pattern is read optically. This optical fingerprint pattern is converted by photoelectric converter element 7, such as a CCD or the like, to binary electrical signals (i.e., to image data) and output.

Operation processing unit 2 includes an image data processing unit 8, a feature extraction unit 9, a comparison unit 10, a database unit 11, a temporary recording unit 12, a write-in processing unit 13 and a user recording unit 14. Database unit 11 consists of a writable non-volatile memory such as an Electrically Erasable Programmable Read-Only Memory (EEPROM). Data concerning feature counts extracted from the fingerprint patterns

of authorized users (hereafter, "feature count data") are stored prior to use in database unit 11. The recording scheme is not discussed in detail, but can be implemented by, for example, a person pressing his finger on fingerprint reader unit 1 while the fingerprint identification device is in a recording mode. Image data processing unit 8 and feature extraction unit 9 extract a feature count, and the resulting feature count data are stored in the database unit 11.

Temporary recording unit 12 consists of an inexpensive, erasable volatile memory such as a RAM. When the person presses his finger on fingerprint reader unit 1 and his fingerprint is read, the fingerprint pattern output by photoelectric converter element 7 in the fingerprint reader unit 1 (i.e., the image data) is temporarily saved.

When photoelectric converter element 7 outputs the fingerprint pattern to image data processing unit 8, the image data processing unit 8 executes various processing routines such as adjustment or compression routines on the fingerprint pattern (i.e., on the image data). Feature extraction unit 9 extracts a feature count from the fingerprint pattern processed by the image data processing unit 8 according to a specified algorithm. The feature count data extracted in this way by feature extraction unit 9 are transmitted to comparison unit 10. Comparison unit 10 reads out feature count data stored in database unit 11 and compares them with the feature count data from the current fingerprint to see if they match.

If the feature count data matches, comparison unit 10 outputs judgment data indicating that the match is successful, and transmits a signal indicating the same to write-in processing unit 13. When it receives the "match successful" signal from comparison unit 10, the write-in processing unit 13 does not execute any processing. Alternatively, it would also be acceptable for comparison unit 10 not to send a signal to write-in processing unit 13 in case the match is successful.

If the feature count data does not match, comparison unit 10 outputs judgment data indicating that the match is unsuccessful, and transmits a signal indicating the same to write-in processing unit 13. When it receives the "match unsuccessful" signal from the comparison unit 10, the write-in processing unit 13 transmits the fingerprint pattern stored in temporary recording unit 12 to the user recording unit 14, where it is stored.

User recording unit 14 consists of a writable non-volatile memory such as an EEPROM. The fingerprint pattern stored in the user recording unit 14 is saved until an erasing routine is executed. If the fingerprint pattern is stored in user recording unit 14 when the match is unsuccessful but not when it is successful, the memory can be used economically. The fingerprint pattern recorded in temporary recording unit 12 can be erased when the next pattern is written over it.

User recording unit 14 and database unit 11 may be two separate memories, or they may be a single memory divided into two regions. Write-in processing unit 13 includes a programmed microprocessor (a CPU). A single microprocessor may serve as the processing unit 13, the image data processing unit 8, the feature extraction unit 9 and the comparison unit 10.

In this fingerprint identification device B to identify fingerprints, if the fingerprint data read by fingerprint reader unit 1 does not match any of the stored fingerprints, the fingerprint pattern output by unit 1 is stored in user recording unit 14. Thus if the match is unsuccessful, even though the fingerprint pattern that is input belongs to an authorized user, the location of the malfunction can be narrowed down. In this embodiment, therefore, since the fingerprint pattern output by photoelectric converter element 7 is stored in the user recording unit 14, it can be restored in the event of a malfunction. This allows the user to determine whether the malfunction occurred in the fingerprint reader unit 1 or the operation processing unit 2, thus simplifying the investigation.

In this embodiment, also, because the fingerprint pattern read by fingerprint reader unit 1 is stored in database unit 11, any pattern that is read can be restored in detail. This allows the pattern to be studied carefully.

With the fingerprint identification device B to identify fingerprints of the first embodiment, if the feature count data does not match a stored fingerprint feature data, the fingerprint pattern is stored in user recording unit 14. This is an effective theft deterrent if the fingerprint identification device is installed in a car. To enhance this effect, a sign might be displayed in the car indicating that fingerprints which do not match those of an authorized driver will be stored, and an alarm could sound when the prints do not match.

Figure 4 is a block diagram of a fingerprint identification device C to identify fingerprints according to a second preferred embodiment of this invention. In the fingerprint identification device C, the fingerprint pattern (or image pattern) resulting from the adjustment or compression routines executed by image data processing unit 8 is stored in the temporary recording unit 12. If the match is unsuccessful, this pattern is saved in the user recording unit 14.

In this embodiment, the fingerprint pattern stored in user recording unit 14 consists of the compressed data processed by image data processing unit 8. The use of compressed data further reduces the consumption of user recording unit 14. Also, with this embodiment, the user can determine in the case of a malfunction whether the problem is visible in the pattern before the feature count is extracted by feature extraction unit 9 or whether it showed up in the data after the feature count is extracted. This simplifies the investigation of malfunctions. Furthermore, the compressed image data can be readily restored to the original image (i.e., the fingerprint pattern), so this embodiment has the same theft-deterrent effect as the first embodiment.

Figure 5 is a block diagram of a fingerprint identification device D to identify fingerprints, according to a third preferred embodiment of this invention. In the fingerprint identification device D, the feature count data output by the feature extraction unit 9 is stored in the temporary recording unit 12. In the event that the prints do not match, the feature count data are saved in the user recording unit 14.

Since in this embodiment only the feature count data extracted by feature extraction unit 9 are stored in user recording unit 14, the memory consumption of user recording unit 14 is further reduced. Also, in this embodiment, it is possible to determine in the event of a malfunction whether the problem shows up in the feature count data extracted by feature extraction unit 9, or whether the problem lies in the matching processing executed by comparison unit 10. This simplifies the investigation of malfunctions. Since the feature count data can be used to distinguish one person from another, this scheme also provides a theft-deterrent effect.

In the embodiments discussed above, a single fingerprint pattern or set of feature

count data is stored in a storage unit. However, if two or more patterns or sets of data were stored, the location of a malfunction could be determined with greater specificity.

Figure 6 is a block diagram of a fingerprint identification device E to identify fingerprints, according to a fourth preferred embodiment of this invention. In the fingerprint identification device E, the fingerprint pattern output by the fingerprint reader 1 is stored in the temporary recording unit 12. This pattern may be either the one output by the image data processing unit 8 or the feature count data output by the feature extraction unit 9. If the comparison unit 10 finds that the prints do not match, write-in processing unit 13 retrieves the pattern stored in the temporary recording unit 12 and saves it in the user recording unit 14 along with the date and time data which is read out of a date counter 15 (generating/storing month, date and time data). Date counter 15 may be a counter built into a microprocessor used as the write-in processing unit 13. This counter, for example, adds the time which has elapsed since fingerprint identification device E was installed and began operating, and determines the date and time according to this elapsed time value.

Since in this embodiment the time that the prints are matched is recorded, the print patterns which are read can be inspected in the order that they were taken. For example, if the density of the image is fading gradually over time, one can conclude that prism 5 of fingerprint reader unit 1 is gradually getting dirtier. One can also determine whether the results of matching are different at night from what they are in the daytime. This feature further enhances the crime-deterrent effect of the fingerprint identification device.

The recording history stored in user recording unit 14 along with the fingerprint pattern need not be limited to date and time data. Power supply voltage or other similar information could also be recorded with the fingerprint.

Figure 7 is a block diagram of a fingerprint identification device F to identify fingerprints, according to a fifth preferred embodiment of this invention. In the fingerprint identification device F, the fingerprint pattern (and the date and time data) are stored in the user recording unit 14 regardless of the result of the matching done by comparison unit 10. In this embodiment, although user recording unit 14 requires a large memory capacity, the configuration of the device is simplified. There is also a large amount of data available to

investigate the cause when a malfunction occurs, which makes it possible to determine in great detail the source of the problem.

5 Other embodiments of the invention will be apparent to those skilled in the art from a consideration of the specification and the practice of the invention disclosed herein. It is intended that the specification be considered as exemplary only, with the true scope and spirit of the invention being indicated by the following claims.

**What is claimed is:**

1. A fingerprint identification device to identify fingerprints, comprising:  
a fingerprint reader unit to input a fingerprint to be detected;  
a database unit to record a fingerprint database provided in advance;  
a fingerprint comparing unit that identifies said input fingerprint input by said  
fingerprint reader unit by comparing with fingerprints stored in said fingerprint database  
recorded in said database unit; and  
a user recording unit that records the fingerprint input by said fingerprint reader unit.

2. The fingerprint identification device according to claim 1, wherein said user  
recording unit records said input fingerprint only when said fingerprint comparing unit does  
not identify said input fingerprint.

3. The fingerprint identification device according to claim 1, wherein said user  
recording unit records said input fingerprint transmitted from said fingerprint reader unit, and  
said transmitted input fingerprint includes a raw data of said input fingerprint.

4. The fingerprint identification device according to claim 1, further comprising an  
image data processing unit to process said input fingerprint.

5. The fingerprint identification device according to claim 4, wherein said user  
recording unit records said input fingerprint transmitted from said image processing unit, and  
said transmitted input fingerprint includes processed data of said input fingerprint.

6. The fingerprint identification device according to claim 1, further comprising a  
feature extraction unit to extract a feature count from said input fingerprint.

7. The fingerprint identification device according to claim 6, wherein said user  
recording unit records the extracted feature count from said feature extraction unit, whereby  
said extracted feature count results in a compact data size.

8. The fingerprint identification device according to claim 1, further comprising a

date counter that provides a date record used to generate a recording history.

9. The fingerprint identification device according to claim 1, wherein said device is used for access control.

### **Abstract**

A fingerprint identification device to identify fingerprints is equipped with a fingerprint reader unit to input a fingerprint to be detected and a database unit to record a fingerprint database which is provided in advance. A fingerprint comparing unit identifies the input fingerprint via the fingerprint reader unit by comparing with the fingerprint database recorded in the database unit and a user recording unit records the input fingerprint input by the fingerprint reader unit.

FIG. 1

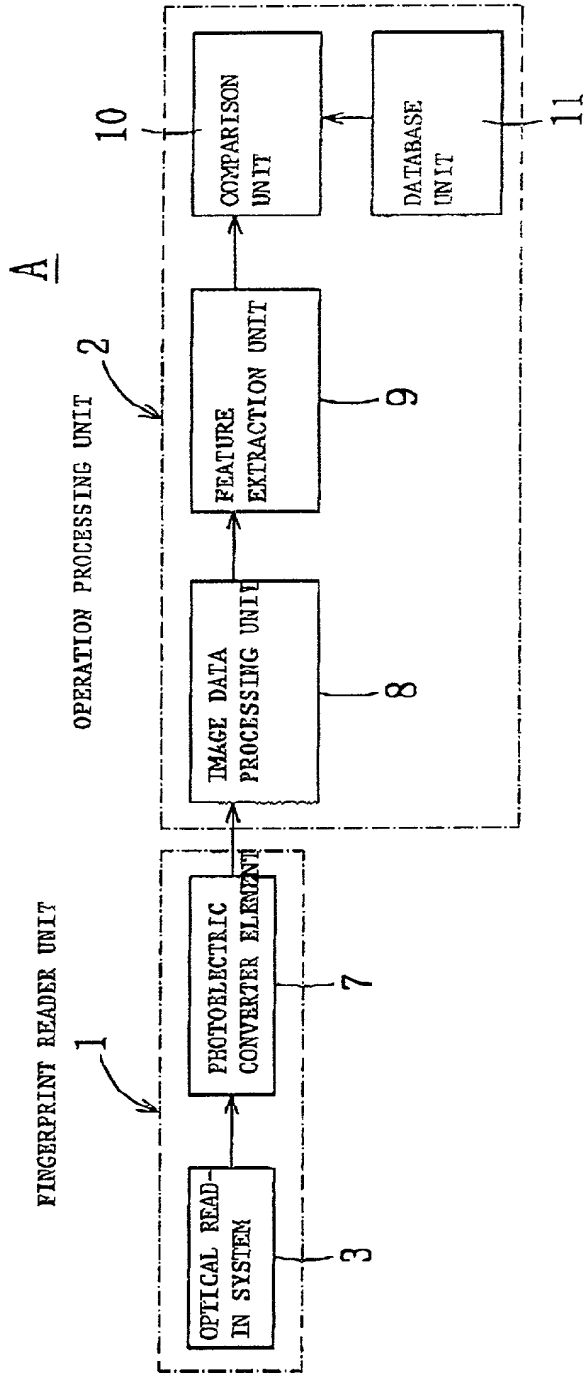


FIG. 2

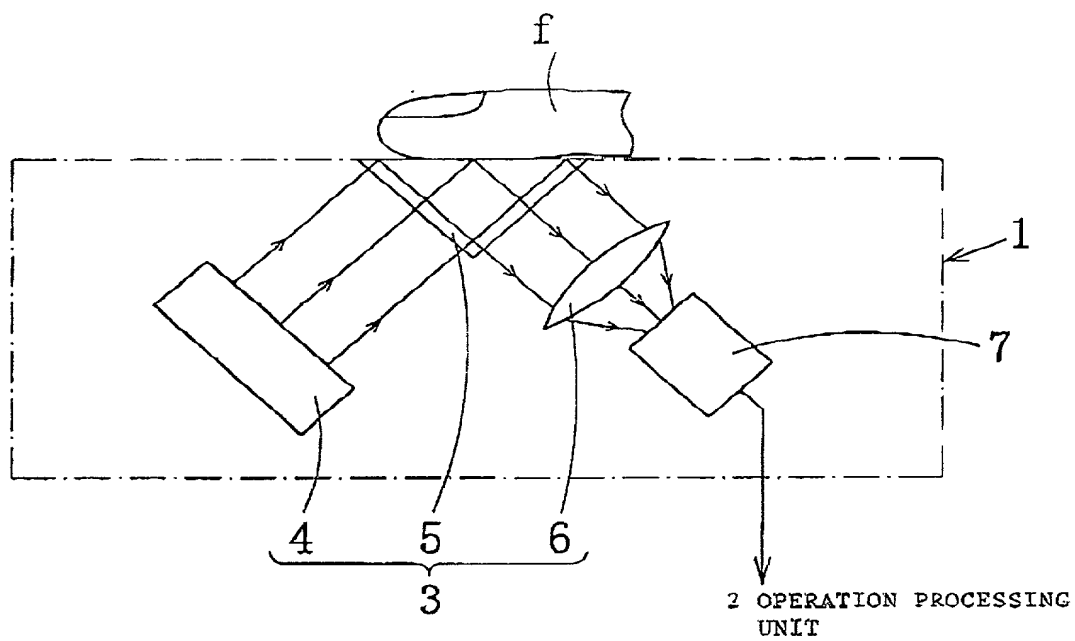


FIG. 3

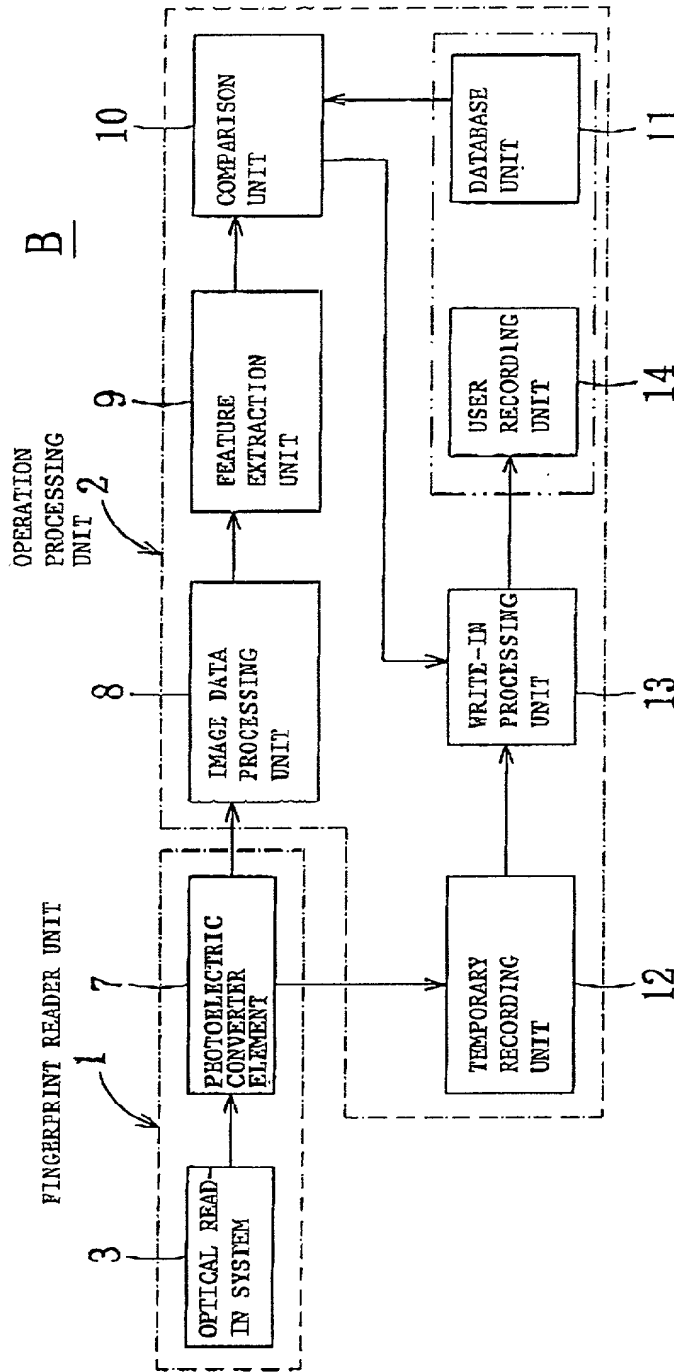


FIG. 4

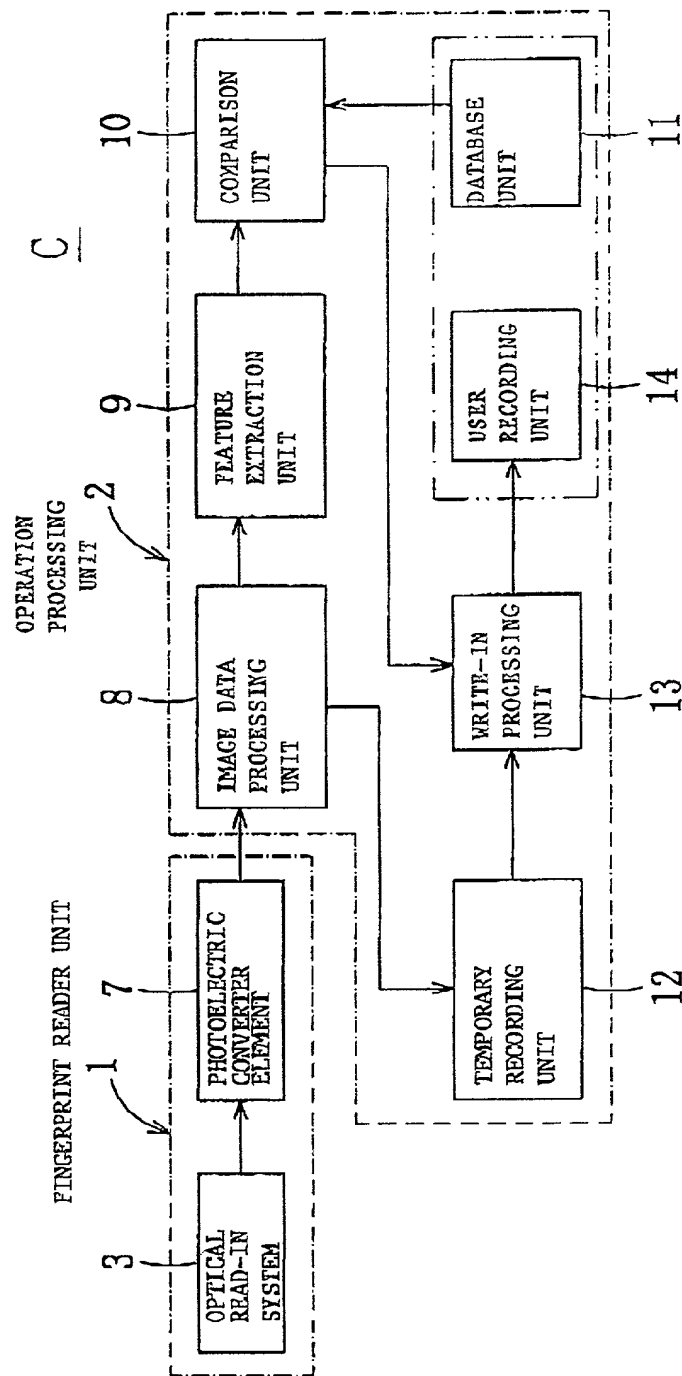


FIG. 5

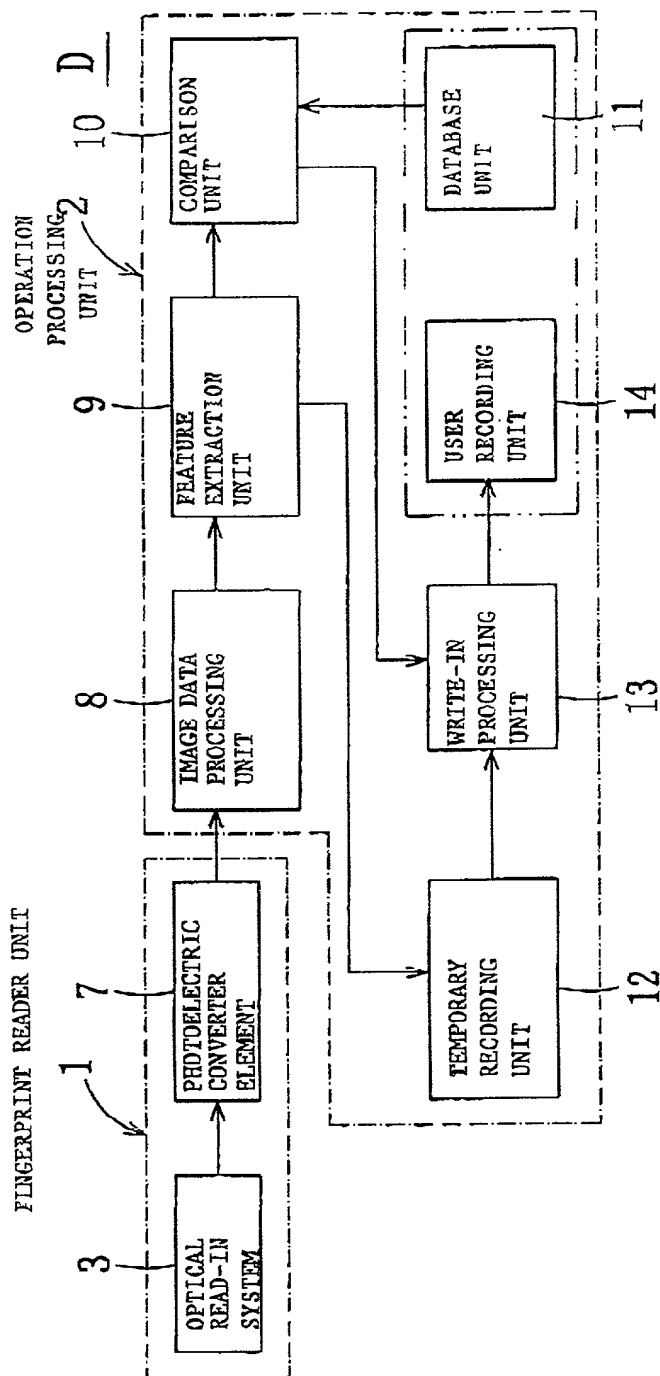


FIG. 6


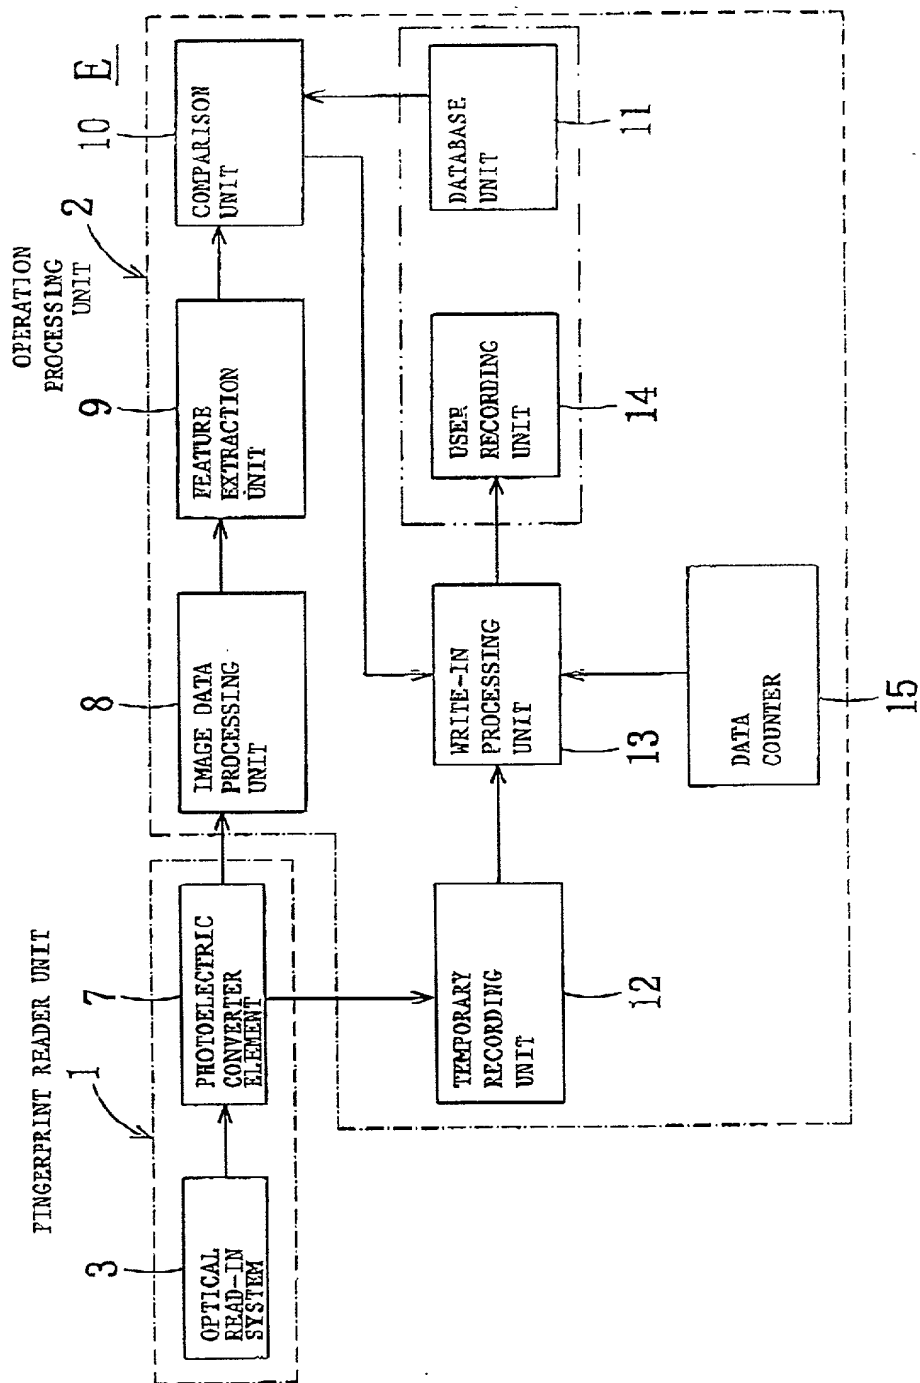


FIG. 7

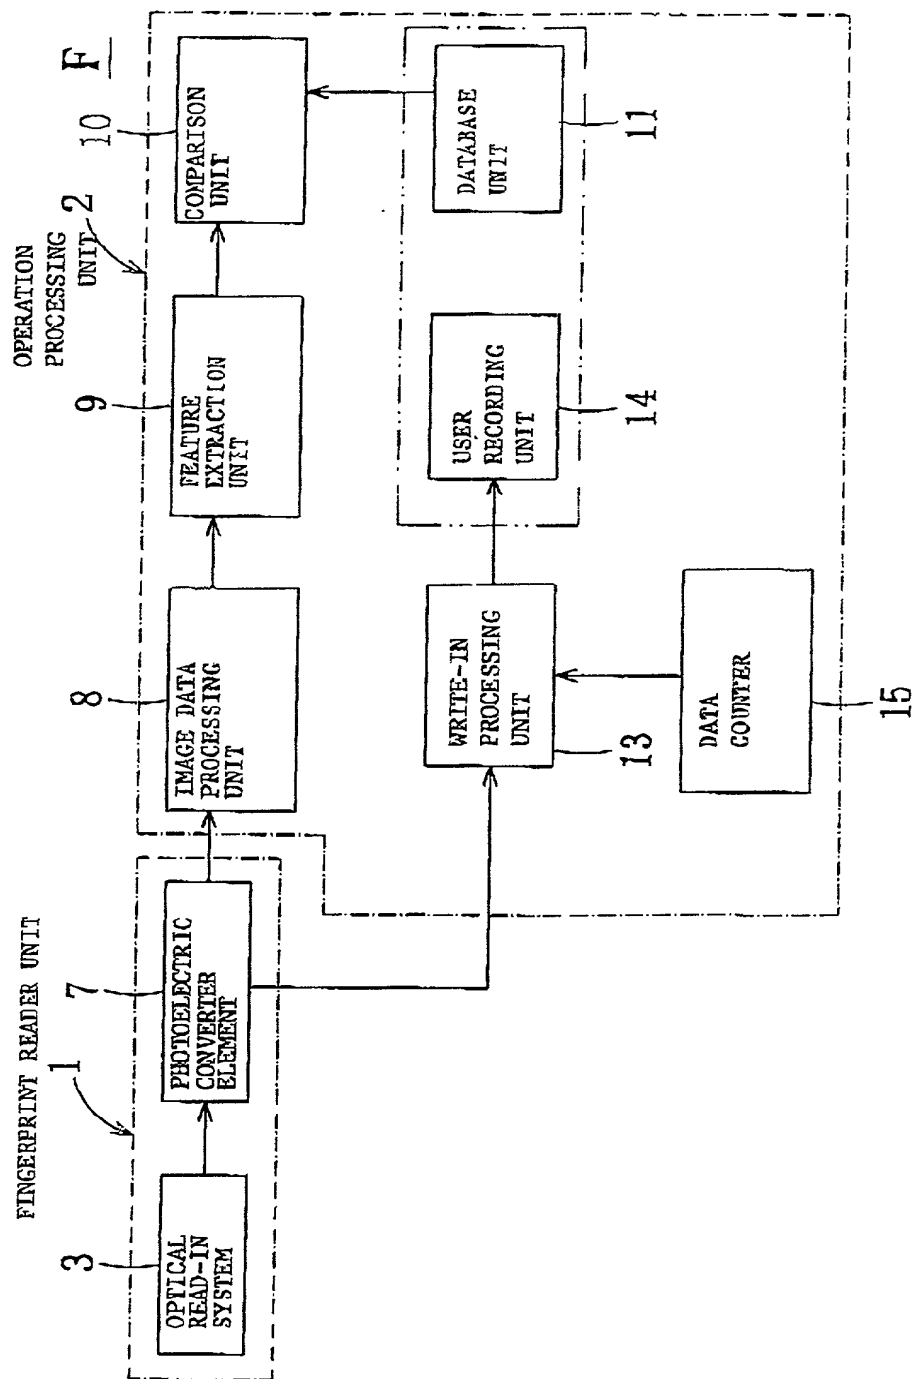

**DECLARATION AND POWER OF ATTORNEY**

As a below named inventor, I HEREBY DECLARE:

THAT my residence, post office address, and citizenship are as stated below next to my name;

THAT I believe I am the original, first, and sole inventor (if only one inventor is named below) or an original, first, and joint inventor (if plural inventors are named below or in an attached Declaration) of the subject matter which is claimed and for which a patent is sought on the invention entitled

---

(Attorney Docket No. 040281-0118)

---

the specification of which (check one)

       Is attached hereto.

.X. Was filed on November 30, 1999 as United States Application Number or PCT International Application Number                      and was amended on                      (if applicable).

THAT I do not know and do not believe that the same invention was ever known or used by others in the United States of America, or was patented or described in any printed publication in any country, before I (we) invented it;

THAT I do not know and do not believe that the same invention was patented or described in any printed publication in any country, or in public use or on sale in the United States of America, for more than one year prior to the filing date of this United States application;

THAT I do not know and do not believe that the same invention was first patented or made the subject of an inventor's certificate that issued in any country foreign to the United States of America before the filing date of this United States application if the foreign application was filed by me (us), or by my (our) legal representatives or assigns, more than twelve months (six months for design patents) prior to the filing date of this United States application;

THAT I have reviewed and understand the contents of the above-identified specification, including the claim(s), as amended by any amendment specifically referred to above;

THAT I believe that the above-identified specification contains a written description of the invention, and of the manner and process of making and using it, in such full, clear, concise, and exact terms as to enable any person skilled in the art to which it pertains, or with which it is most nearly connected, to make and use the invention, and sets forth the best mode contemplated by me of carrying out the invention; and

THAT I acknowledge the duty to disclose to the U.S. Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56.

I HEREBY CLAIM foreign priority benefits under Title 35, United States Code § 119(a)-(d) or § 365(b) of any foreign application(s) for patent or inventor's certificate, or § 365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below any foreign application for patent or inventor's certificate or of any PCT international application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application Number	Country	Foreign Filing Date	Priority Claimed?	Certified Copy Attached?
10-377135	Japan	29/Dec/98	Yes	No

I HEREBY CLAIM the benefit under Title 35, United States Code § 119(e) of any United States provisional application(s) listed below.

U.S. Provisional Application Number	Filing Date

I HEREBY CLAIM the benefit under Title 35, United States Code, § 120 of any United States application(s), or § 365(c) of any PCT international application designating the United States of America, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

U.S. Parent Application Number	PCT Parent Application Number	Parent Filing Date	Parent Patent Number

I HEREBY APPOINT the following registered attorneys and agents of the law firm of FOLEY & LARDNER to have full power to prosecute this application and any continuations, divisions, reissues, and reexaminations thereof, to receive the patent, and to transact all business in the United States Patent and Trademark Office connected therewith:

ALAN I. CANTOR	Reg. No.	28,163
ARTHUR SCHWARTZ	Reg. No.	22,115
BERNHARD D. SAXE	Reg. No.	28,665
BRIAN J. MC NAMARA	Reg. No.	32,789
CHARLES F. SCHILL	Reg. No.	27,590
COLIN G. SANDERCOCK	Reg. No.	31,298
DAVID A. BLUMENTHAL	Reg. No.	26,257
GEORGE E. QUILLIN	Reg. No.	32,792
GLENN LAW	Reg. No.	34,371
HAROLD C. WEGNER	Reg. No.	25,258
JOHN J. FELDHAUS	Reg. No.	28,822
JOHN P. ISACSON, JR.	Reg. No.	33,715
KENNETH E. KROSIN	Reg. No.	25,735
MICHAEL D. KAMINSKI	Reg. No.	32,904
PATRICIA D. GRANADOS	Reg. No.	33,683
PETER G. MACK	Reg. No.	26,001
RICHARD C. PEET	Reg. No.	35,792
RICHARD LINN	Reg. No.	25,144
RICHARD L. SCHWAAB	Reg. No.	25,479
STEPHEN A. BENT	Reg. No.	29,768
SYBIL MELOY	Reg. No.	22,749
WILLIAM T. ELLIS	Reg. No.	26,874

and I request that all correspondence be directed to:

FOLEY & LARDNER  
Washington Harbour  
3000 K Street, N.W., Suite 500  
Washington, D.C. 20007-5109

Telephone: (202) 672-5300  
Facsimile: (202) 672-5399

I UNDERSTAND AND AGREE THAT the foregoing attorneys and agents appointed by me to prosecute this application do not personally represent me or my legal interests, but instead represent the interests of the legal owner(s) of the invention described in this application.

I FURTHER DECLARE THAT all statements made herein of my own knowledge are true, and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

Name of first inventor	Hiroataka ISHII
Residence	Tyoto, Japan
Citizenship	Japan
Post Office Address	C/o OMRON Corporation, 10 Tsuchido-cho, Hanazono, Ukyo-ku, Tyoto, Japan 616-8025
Inventor's signature	
Date	

Name of second inventor	Takeo MORITA
Residence	Tyoto, Japan
Citizenship	Japan
Post Office Address	C/o OMRON Corporation, 10 Tsuchido-cho, Hanazono, Ukyo-ku, Tyoto, Japan 616-8025
Inventor's signature	
Date	

Name of third inventor	Yasuhide YOMO
Residence	Tyoto, Japan
Citizenship	Japan
Post Office Address	C/o OMRON Corporation, 10 Tsuchido-cho, Hanazono, Ukyo-ku, Tyoto, Japan 616-8025
Inventor's signature	
Date	
Name of fourth inventor	
Residence	
Citizenship	
Post Office Address	
Inventor's signature	
Date	
Name of fifth inventor	
Residence	
Citizenship	
Post Office Address	
Inventor's signature	
Date	
Name of sixth inventor	
Residence	
Citizenship	
Post Office Address	
Inventor's signature	
Date	